
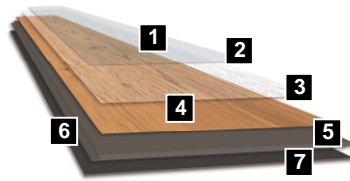




















# TECHNICAL CHARACTERISTICS

wineo 400				wineo		
Heterogeneous resilient-flooring for glueless installation - Covering type according to EN ISO 10582						
	wineo 400 wood	wineo 400 wood XL	wineo 400 stone			
<b>Format</b>	1212 x 187 mm	1507 x 235 mm	600 x 316 mm			
<b>Product thickness</b>	4.5 mm	4.5 mm	4.5 mm			
<b>Planks, tiles / m<sup>2</sup> per box</b>	10 / 2.27 m <sup>2</sup>	6 / 2.12 m <sup>2</sup>	12 / 2.28 m <sup>2</sup>			
<b>Boxes / m<sup>2</sup> per pallet</b>	48 / 108,96 m <sup>2</sup>	52 / 110,24 m <sup>2</sup>	48 / 109.44 m <sup>2</sup>			
<b>Guarantee</b>	15 years – Guarantee for private use according to Windmüller warranty conditions – www.wineo.de					
<b>Classification</b>				<b>Product composition</b>		
	<b>Utilization class 23</b> EN ISO 10874	Heavy-duty use in the domestic area		1 <b>Surface sealing</b>		
	<b>Utilization class 31</b> EN ISO 10874	Medium use in the commercial sector		2 <b>Surface texture</b> Various embossings		
	Wear layer binder content EN ISO 10582	Type I		3 <b>Wear layer</b> Thickness 0.3 mm		
	Anti slip category DIN 51130	R 9		4 <b>Decor</b> Decor film		
	Staining and chemical resistance EN ISO 26987	Good resistance according to the concentration and residence time		5 <b>Base layer</b> with glass fibre reinforced		
	Light fastness EN ISO 105-B02	Light fastness (method 2) ≥ 6		6 <b>Profile connection</b> Connect technology 		
	Residual indentation EN ISO 24343-1	≤ 0.1 mm		7 <b>Backing</b>		
	Thermal resistance EN 12667	0.012 (m <sup>2</sup> K)/W without insulation mat 0,022 (m <sup>2</sup> K)/W with insulation mat silentCOMFORT		<b>Insulation mat</b> silentCOMFORT (separately available)		
	Impact sound reduction EN ISO 16251-1	~ 7 dB up to 14 dB in combination with silentCOMFORT		wood – bevelled edge wood XL – registered embossed surface, bevelled edge stone – real joint		
	Disposal	<u>Private:</u> Possible with normal domestic refuse <u>Commercial:</u> Refuse-key-no. AVV 170203				
 <p>Windmüller GmbH Nord-West-Ring 21 D-32832 Augustdorf</p> <p>DOP: 0301010 EN 14041:2004 / AC2006 1658</p> <p>    </p> <p>www.wineo.de</p>				 <p>Information representative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)</p>	 <p>70 710 4061-6 www.proficert.com</p> <p> tested for emissions, harmful substances</p> <p><b>PREMIUM</b></p>	<p>factory made <b>coated</b></p> <p>Phthalat frei 100% Phthalat frei</p>
<b>Relevant information:</b>						
<ul style="list-style-type: none"> <li>Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.</li> <li>Cleaning and care: see separate cleaning &amp; care instruction.</li> <li>Technical subjects can be changed by Windmüller GmbH.</li> </ul>						